

Induction Coil Magnetometers

LEMI-118
LEMI-120
LEMI-121
LEMI-123
LEMI-134

Fluxgate Magnetometers

LEMI-011
LEMI-018
LEMI-019
LEMI-022
LEMI-024
LEMI-025
LEMI-029
LEMI-031

Electrodes & E-field Measurements

LEMI-701

Magnetic and Magnetotelluric Stations

LEMI-030
LEMI-417
LEMI-418

Calibration Systems

LEMI-901
LEMI-931

Special Products

LEMI-017
LEMI-204
LEMI-301

Product description


The LEMI-029 fluxgate magnetometer is based on three orthogonal fluxgate sensor elements combined with low noise excitation and registration electronics, automatic digital static field compensation and exceptional three channel 32 bit digitization. The sensor can be controlled and operated using standard RS-232 or SPI interfaces. Optional external timing signals allow for precise time synchronization of multiple LEMI-029 and enable the use of this sensor in distributed sensor networks. In addition to the magnetic measurements the LEMI-029 senses three components of static acceleration to enable the calculation of its orientation and of Euler angles. This feature makes the LEMI-029 particularly useful in applications where the placement of the sensor cannot be controlled by the user.

Application description

LEMI-029 fluxgate magnetometers are used for measurements of magnetic fields in the frequency range from DC to 180 Hz. Their wide bandwidth and low noise make them the ideal sensor for a wide variety of applications. The sensor can be placed in any orientation without the use of a gimbal system.

Highlights

- Low noise (6 pT/ $\sqrt{\text{Hz}}$ @ 1 Hz)
- Exceptional low-frequency stability
- Static field compensation
- 32 bit ADC
- RS-232 and SPI output
- Timing, synchronization of multiple units

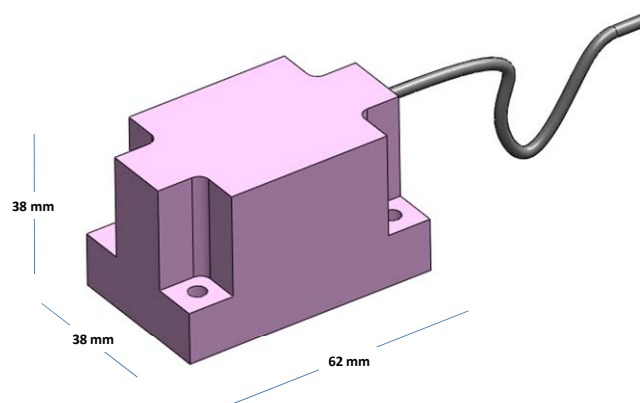

LEMI-029 dimensional drawing (sensor element only)




Mail:


LEMI Laboratory for Electromagnetic Innovation
5-A Naukova Street
Lviv, 79000, Ukraine

Internet:

Web – www.lemisensors.com
Email – sales@lemisensors.com

Phone:

 + 001 713 532 8144
 + 049 221 95279794
 + 380 322 639163

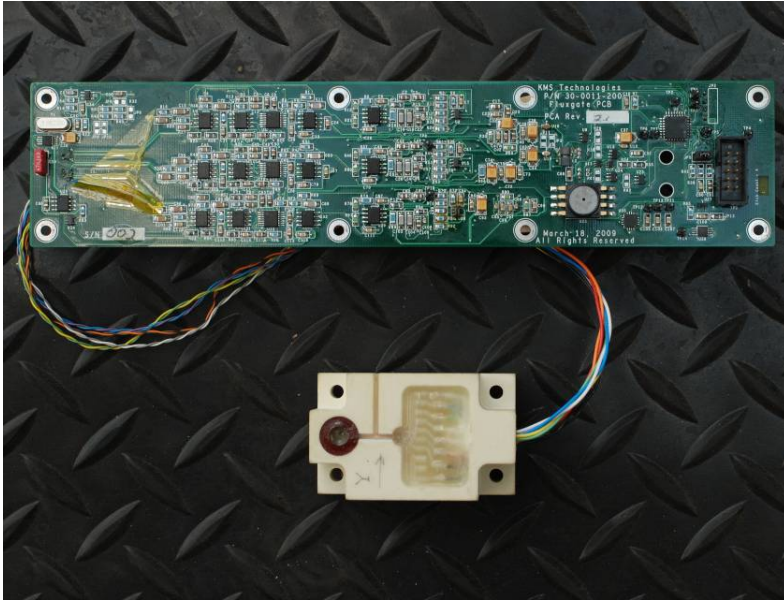


LEMI-029 Digital Fluxgate Magnetometer

Specifications

| | |
|---|---|
| Sensor elements | 3 orthogonal elements |
| Length | 62 mm (sensor) |
| Width | 38 mm (sensor) |
| Height | 38 mm (sensor) |
| Weight | ≤ 85 g (sensor) |
| Sensor assembly | Screw mount |
| Frequency range | DC to 180 Hz |
| 3 dB points of frequency band | 180 Hz |
| Total dynamic range | ± 78,000 nT |
| Dynamic range after compensation | ± 5,400 nT |
| Noise level @ 1 Hz | ≤ 6 pT/√ Hz |
| Compensation | Digital feedback |
| ADC output | 3 channel, 24 bit (32 bit optional) |
| Digital output | RS-232, SPI |
| Construction material | Syntactic foam |
| Power consumption | 425 mW |
| Power supply voltage | ± 5 V & + 3.3 V |
| Temperature rating | 0°C to 70°C |
| Shock resistance | 100 G, 3.5 ms |
| Vibration resistance | 4.8 G rms |
| Auxiliary sensors | 3-component acceleration, temperature, pressure |

Frequency response

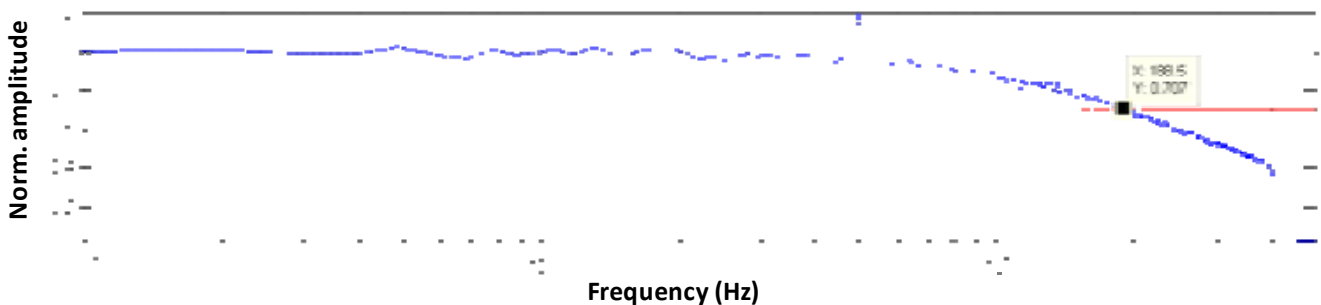

Frequency response of the LEMI-029 Digital Fluxgate Magnetometer




Mail:

LEMI Laboratory for Electromagnetic Innovation
5-A Naukova Street
Lviv, 79000, Ukraine

Internet:

Web – www.lemisensors.com
Email – sales@lemisensors.com

Phone:

 + 001 713 532 8144
 + 049 221 95279794
 + 380 322 639163